



PaveSystems pricelist 2015



Pave-T[®]

Pave-X[®]

Pave-I[®]

Pave-V[®]

Pave-K[®]

Pave-Drain[®]

• Packaging and quantities:

Pave-T, X, I and V are packed in sacks.

The prices on these pages are combined with 3 different sack sizes.

sack of 100 pcs.

sack of 252 pcs

sack of 1.000 pcs.

If ordering even larger quantities, we are ofcourse able to pack suitable to onsite solution.

• Sizes of the spacers

Spacers are available on 3 different heights. Each sack is markt with a colour label, determining the height - the same goes for navigating in the pricelist.



The gap of the spacers varies between 3 mm and 10 mm, as shown in the box for each type of spacer. Quantity and price are connected so that lowest price per piece is obtained when ordering minimum one thousand pieces per unit.

Material

The spacers are made of polyethylen (PELD/HD), a frostproof re-cycle plast material. Non toxic Made in Denmark. Production is run by ourselves in order to secure high quality products without waste or environmental hazzards according to our environmental philosophie and moral standards. Any second grade products can be re-used by regeneration and re-production.

Sales-/delivery-terms

Most of the spacers are on-stock goods and can be shipped same day as ordering, however larger quantities and temporary out of stock situations means a general-production and delivery planning of 2 - 6 weeks from ordering.

All prices are ex Works 8544 Mørke DK.

Pave T, X,V and I can be packed in individuelle sizes. Please contact Excellent Systems A/S for price offer and delivery time.

-All prices are in € (euro).

-All prices are without pallets, freight or VAT.






Product description

Sacks of T shaped spacers.

In the box below prices are shown in 20 mm, 35 mm and 45 mm height, with a gap of 3 mm - 10 mm.

Height	Pieces	Gap							
		3 mm	4 mm	5 mm	6 mm	7 mm	8 mm	9 mm	10 mm
20 mm	100	21,-	22,-	23,-	24,-	-	-	-	-
	252	48,-	50,-	52,-	54,-	-	-	-	-
	1.000	170,-	180,-	190,-	200,-	-	-	-	-
35 mm	100	24,-	25,-	26,-	28,-	29,-	30,-	31,-	32,-
	252	54,-	58,-	61,-	64,-	67,-	69,-	72,-	75,-
	1.000	200,-	210,-	220,-	230,-	240,-	250,-	260,-	270,-
45 mm	100	-	-	-	-	32,-	34,-	35,-	36,-
	252	-	-	-	-	75,-	78,-	80,-	83,-
	1.000	-	-	-	-	270,-	280,-	290,-	300,-

Example:

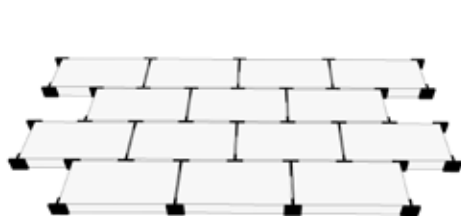



Product description

Sacks of X shaped spacers.

In the box below prices are shown in 20 mm, 35 mm and 45 mm height, with a gap of 3 mm - 10 mm.

Height	Pieces	Gap							
		3 mm	4 mm	5 mm	6 mm	7 mm	8 mm	9 mm	10 mm
20 mm	100	20,-	22,-	23,-	24,-	-	-	-	-
	252	47,-	50,-	53,-	55,-	-	-	-	-
	1.000	170,-	180,-	190,-	200,-	-	-	-	-
35 mm	100	25,-	26,-	28,-	29,-	30,-	31,-	32,-	34,-
	252	58,-	61,-	64,-	67,-	69,-	72,-	75,-	78,-
	1.000	210,-	220,-	230,-	240,-	250,-	260,-	270,-	280,-
45 mm	100	-	-	-	-	34,-	35,-	36,-	37,-
	252	-	-	-	-	78,-	80,-	83,-	86,-
	1.000	-	-	-	-	280,-	290,-	300,-	310,-

Example:

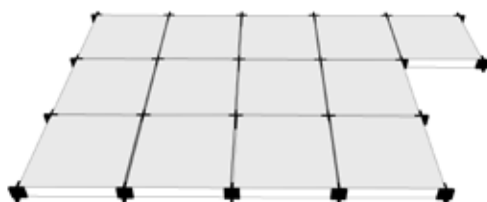




Product description

Sacks of I shaped spacers.

In the box below prices are shown in 20 mm and 35 mm height, with a gap of 3 mm - 6 mm.

Height	Pieces	Gap			
		3 mm	4 mm	5 mm	6 mm
20 mm	100	10,-	11,-	12,-	13,-
	252	22,-	25,-	28,-	30,-
	1.000	80,-	90,-	100,-	110,-
35 mm	100	13,-	14,-	16,-	17,-
	252	30,-	33,-	36,-	39,-
	1.000	110,-	120,-	130,-	140,-



Product description

Sacks of V shaped spacers.

In the box below prices are shown in 20 mm and 35 mm height, with a gap of 3 mm - 6 mm.

Example:




Produkt beskrivelse:

Sacks of V shaped spacers.

In the box below prices are shown in 20 mm and 35 mm height, with a gap of 3 mm - 6 mm.

Height	Pieces	Gap			
		3 mm	4 mm	5 mm	6 mm
20 mm	100	19,-	20,-	21,-	22,-
	252	45,-	47,-	49,-	50,-
	1.000	161,-	168,-	175,-	182,-
35 mm	100	22,-	23,-	24,-	25,-
	252	50,-	52,-	54,-	56,-
	1.000	182,-	189,-	196,-	203,-



Application: Pave-V is for Triangular slabs and stones, protecting the tip and assuring an even distance in the layout. An strengthening solution when placed in an environment with automotive pressure apply. The V shape is flexible to fit almost any triangular stone shape.




Product description


Pave-K is made of Pave-V and Pave-I by assembly, they are delivered in separate sacks.

In the box below are shown prices in 20 mm and 35 mm.


Height	Pieces	Gap			
		3 mm	4 mm	5 mm	6 mm
20 mm	100	29,-	31,-	33,-	35,-
	252	67,-	72,-	77,-	80,-
	1.000	241,-	258,-	275,-	292,-
35 mm	100	35,-	37,-	40,-	42,-
	252	80,-	85,-	90,-	95,-
	1.000	292,-	309,-	326,-	343,-



Application: Pave-K is applied when making a layout pattern combining straight and triangular shapes. The Pave-V is flexible to almost any angle 5-105 grades.

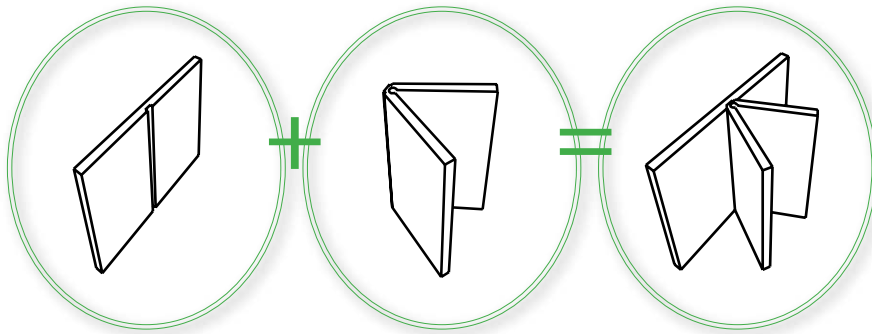

Example:

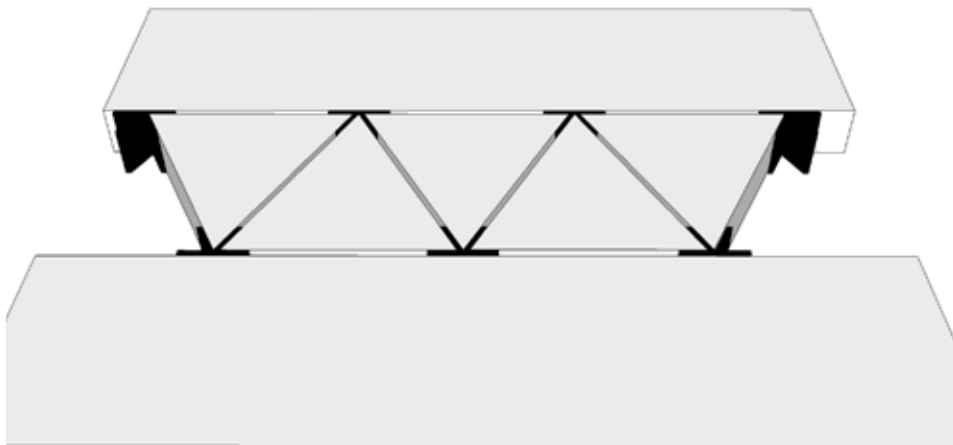

PaveDrain® T




Product description


Sacks of T shaped spacers.

In the box below prices are shown in 35 mm and 48 mm height, with a drainage gap of 20 mm. Doesnt need top inclination when constructed!

Height	Pieces	Gap
		20 mm
35 mm	100	34,-
	252	78,-
	1.000	280,-
48 mm	100	37,-
	252	86,-
	1.000	310,-

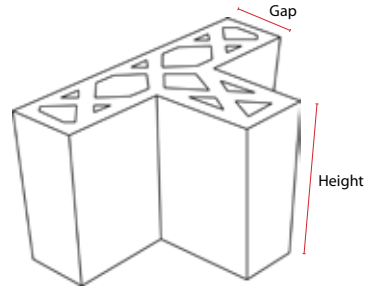

Example:

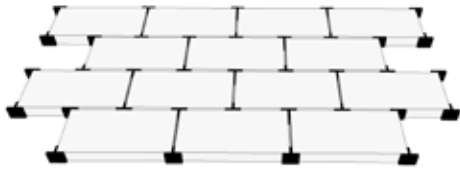

PaveDrain® X




Product description


Sacks of X shaped spacers.

In the box below prices are shown in 35 mm and 48 mm height, with a drainage gap of 20 mm. Doesn't need top inclination when constructed!

Height	Pieces.	Gap
		20 mm
35 mm	100	48,-
	252	112,-
	1.000	404,-
48 mm	100	53,-
	252	121,-
	1.000	438,-



Example:

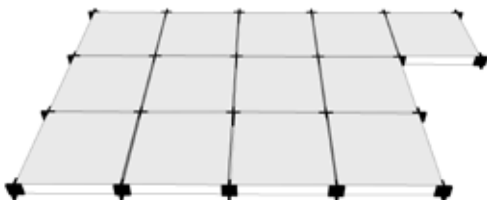

About **PaveDrain**[®]

Local drainage solution - is a new terminology in most countries. In short it is based on handling rain-water without leading it to sewerage.

PaveDrain[®] is specially developed to drain surface water.



PaveDrain[®] is a spacer for a paving pattern with open gaps. The spacer works as a support and strengthening solution for a 20 mm gap distance. They also provide an even distance securing the lines of the layout pattern. The functionality of the spacer is combined with a buildup bottom layer of gravel. The build up contains 3 layers with the bottom being of highest gravity, a mid section and a toplayer of fine gravity. The material in the upper layer for slab/stone placement is the same as used in the gap, there is no use of sand in this solution! The advantage of this solution is that rainwater will seep down directly to impact and not lead to sewerage.

The bottom works as a rainwaterreservoir and can therefor take a large cloudburst and shortly after the pavemant will be dry again not leaving any puddles. Establishment is also easier due to not having need of inclination.

Sidegevinst: A graduate waporising of rainwater from reservoir in summer time is cooling and in winter time the open gaps will lead earth warmth up, making snow melt faster.

The amount of spacers needed is determined by slab size and layout pattern.

Manufactured in a frostproof re-cycle material without toxins, negative sideeffects for extrem durability. www.pavepad.com

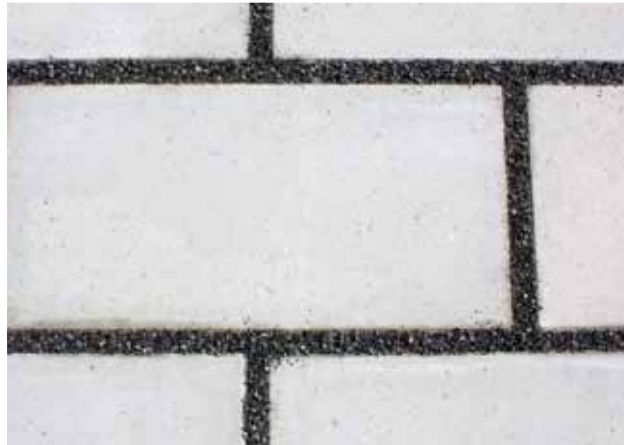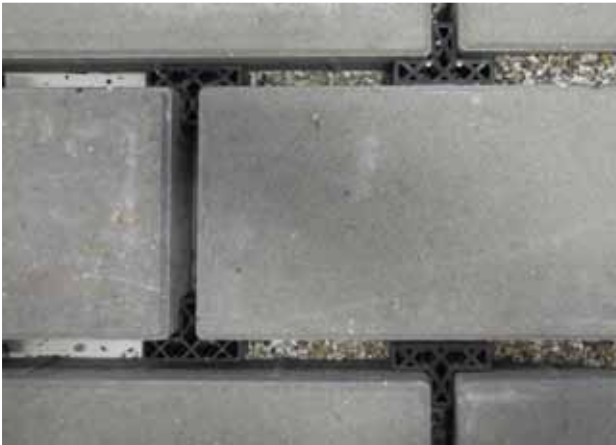

The correct solution is a combination of bottom material, slab/stone size and gap. The target is to obtain an open surface of 10-14% suitable for traffic kategori T2.

The **PavePad** System

Excellent Systems A/S
Møllevvej 2 • 8544 Mørke • Danmark
tlf +45 8637 7133 • fax +45 8637 7995
mail info@pavepad.com • www.pavepad.com

Pricelist 2015, 1. edition
S.E & O.



excellent systems as